



# Tool Tips

## Operation & Safety

# MK-1080

## Head Stop Installation

### Safety Practices:

Always use with a GFCI protected receptacle.

Always wear eye protection when operating or working near this equipment. This tool produces considerable mist and sharp debris under normal operation.

Wear a dust mask to avoid breathing heavy dust or mist, and to protect against debris.

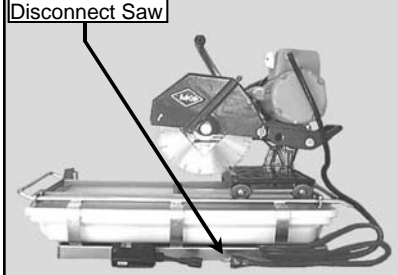
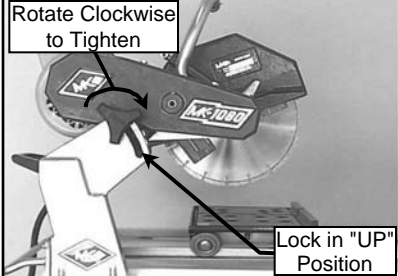
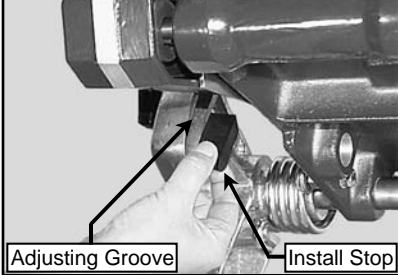
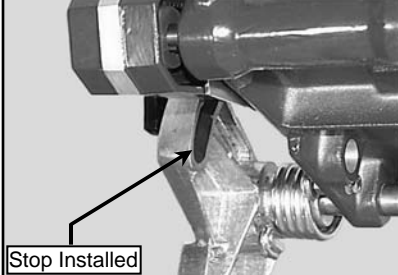
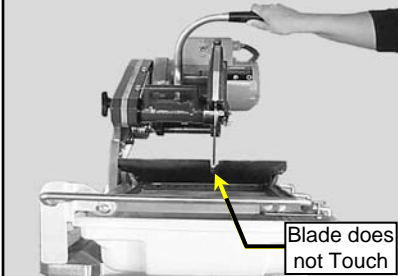
Keep the blade guard in place at all times.

Always disconnect the power cord before cleaning, replacing the blade, or servicing the tool.

Never leave the saw running unattended. Turn the power off.

Never use the saw on an unsupported surface to avoid accidents.

**Application:** The MK-1080 Cutting Head Stop prevents the user from cutting through the Movable Cutting Table.

Step	Action	
1.	<b>Disconnect Saw</b> a) Unplug the GFCI from Power Source b) Unplug Saw from GFCI	 <p>Disconnect Saw</p>
2.	<b>Lock Cutting Head</b> a) Lock the Cutting Head in the "UP" Position	 <p>Rotate Clockwise to Tighten</p> <p>Lock in "UP" Position</p>
3.	<b>Orient Stop</b> a) Orient Rubber Stop to inside of Rear Post Adjusting Groove	 <p>Adjusting Groove</p> <p>Install Stop</p>
4.	<b>Install Stop</b> a) Press Rubber Stop into Adjusting Groove until "flush" with Rear Post	 <p>Stop Installed</p>
5.	<b>Verify Stop</b> a) Release Cutting Head b) Verify Rubber Stop prevents Cutting Head from contacting Cutting Groove of Movable Cutting Table	 <p>Blade does not Touch</p>