

# www.mkdiamond.com

# **MK-1280 CART ASSEMBLY**





1280 Cart Instruction Sheet Part # 167437-IS

#### MK-1280 CART ASSEMBLY

### CART ASSEMBLY (OPTIONAL ACCESSORY)




Fig. A Place cart upside down on a flat surface




Fig. B Place one flat washer on each of the 16 bolts




Fig. C Place swivel casters on front bolts, followed by one flat washer, one lock washer and a nut. Tighten each nut to secure caster




Fig. D Place stationary casters on rear bolts with brake facing out. Place one flat washer, one lock washer and a nut on each bolt. Tighten each nut to secure caster. Turn cart upright

#### HANDLE ASSEMBLY



Fig. A Place handle in the middle of tow bracket. Slide one washer on to bolt and slide through hole



Fig. B Place washer and Nylok nut on end of bolt and tighten

#### MK-1280 CART ASSEMBLY

#### LOCK ASSEMBLY



Fig. A Place one nut on each hook bolt. Thread nut 2/3 up the hook bolt



Fig. B Place hook bolt through rear hole of tow bracket



Fig. C Place washer on knob and thread knob on to hook bolt



Fig. D Place Nylok nut on bottom of hook bolt and tighten. Repeat procedure for rear lock



Fig. E Place saw on cart. Place hook bolt over saw handle. Tighten knob

#### SETTING BRAKE



Fig. A To set brake press "on" the lever on back casters


NOTE:

The wheels and casters each have a zerk fitting that needs to be lubricated every 6 months or as needed.





## ASSY, CART - P/N 166581

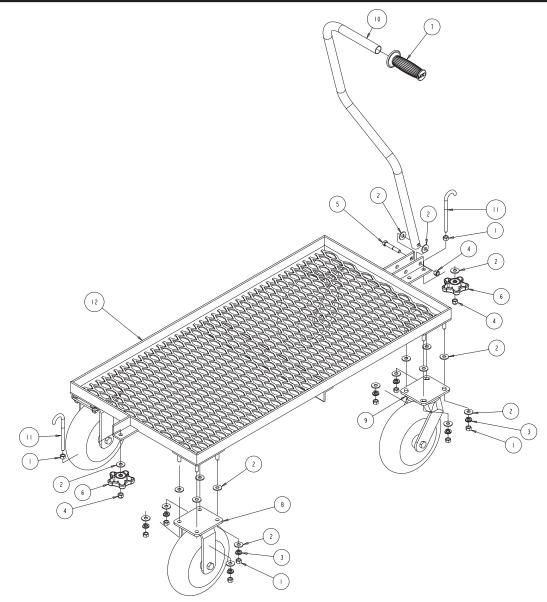

ITEM	DESCRIPTION	PART#	QTY
1	NUT, 3/8 - 16 HEX	101188	18
2	WASHER, FLAT, USS, 3/8	101360	36
3	WASHER, 3/8 SPLIT LOCK	150925	16
4	NUT, 3/8 - 16 NYLOK HEX	152505	3
5	SCREW, 3/8 - 16 X 2-1/4 HEX HEAD	153529	1
6	KNOB, ADJ MK1408 5-PRONG -RAW	155239	2
7	GRIP, HANDLE 7/8 ID	158608	1
8	CASTER, 10" RIGID	167772	2
9	CASTER, 10' SWIVEL	167773	2
10	HANDLE, CART	167774	1
11	BOLT, HOOK, 38 - 16 X 5	167775	2
12	FRAME, CART	167776	1